



[Datasheet](#)

NHR 9420 AC Power Source with HiVAR[®]



NI is now part of Emerson.

ni.com

Table of Contents

03 NHR 9420 AC Power Source with HiVAR

Applications

Best for

Key Features

Physical and Safety

04 HiVAR: More Than Twice the Apparent Power Capability per Kilowatt

04 Exceptional Configuration Flexibility

05 Comprehensive Built-In Measurement System

05 EnergyStar Measurements

05 Power Line Disturbance Simulation

06 Waveforms

06 Physical Connections and Controls

07 NHR 9420 AC Power Source Specifications

NHR 9420 AC Power Source with HiVAR

Applications



AVIATION



AEROSPACE



DEFENSE



MILITARY



MANUFACTURING



R&D

BEST FOR:

ATE use in Aviation, Aerospace, Defense, Military/Mission Critical Testing, Manufacturing Test, Research & Development and more.

KEY FEATURES:

- Voltage Ranges – 175/350VRMS, 200/400VDC
- 6 models – 12kW to 96kW
- Unique configuration flexibility provides for single, split, three-phase operation plus full-power DC
- HiVAR® eliminates derating nominal power due to reactive loads
- Frequency – 30 to 880Hz
- High-resolution waveform digitizer and scope display
- Precision ultra-low current measurements
- Seamless, constant-power operating envelope
- Built-in 9" TP UI for manual control and measurement display
- Graphical waveform editor for user-defined waveforms
- High-level line disturbance programming Macros
- External PC option to host emPower® Test Sequencer
- Alternate programming in LabVIEW, native SCPI, and other IVI-compliant languages
- Improved power density, half the height of traditional AC sources

PHYSICAL AND SAFETY:

MODEL	9420-12	9420-24	9420-36	9420-48	9420-72	9420-96
Physical						
Connectors	Phoenix Contact	Terminal blocks and bus bars				
Form	Chassis	Single Cabinet			Double Cabinet	
Dimensions (HxWxD)	15½ x 19 x 28"/ 400 x 483 x 711mm	46 x 23 x 30"/ 1168 x 584 x 762mm	49 x 23 x 30"/ 1981 x 584 x 762mm	61 x 23 x 30"/ 1981 x 584 x 762mm	78 x 46 x 30"/ 1981 x 1168 x 762mm	
Weight	1551bs/70kg	4801bs/218kg	6401bs/290kg	7801bs/353kg	12801bs/581kg	15601bs/708kg
Operating Temperature	35°C, Non-Condensing					
Safety						
UUT Prog. Limits	V Min/Max, I Max, W Min/Max, each with time delay values			Isolation	Facility to Chassis - 1kV, Facility to Output - 2kV, Output to Chassis - 1kV1	
Physical	User Interlock, Emergency Stop and remote e-Stop connection			Watchdog	A continuous communication verification program controlled by a test executive	
Internal Protection	Over-Voltage, Over-Current, Over-Power, Over-Temp.			Self Test	An automatic hardware check upon power-up	
EMC	CE Mark					

HiVAR: More Than Twice the Apparent Power Capability per Kilowatt

The Model 9420 redefines selection of an AC Power Source by addressing how to compensate for reactive power from capacitive or inductive elements in the load. Often overlooked when sizing a source, reactive power negates some portion of nominal VA power in order to arrive at true power (Watts) that does the real work. Traditional AC sources list only their VA rating leaving it up to the user to figure out how much true power remains after reactive power reductions. In many cases that reduction is substantial and then requires selecting a much larger VA-rated source than originally anticipated. The increased cost and size penalties are often considerable.

The Model 9420 AC Source utilizing HiVAR® technology avoids this VA derating penalty by allowing the source to be specified in true power while providing more than twice the reactive power capability for loads with capacitive or inductive elements. To make the AC source selection process more transparent, NHR list both kW and kVA for each model thereby assuring that an adequately-rated source is considered at the outset.

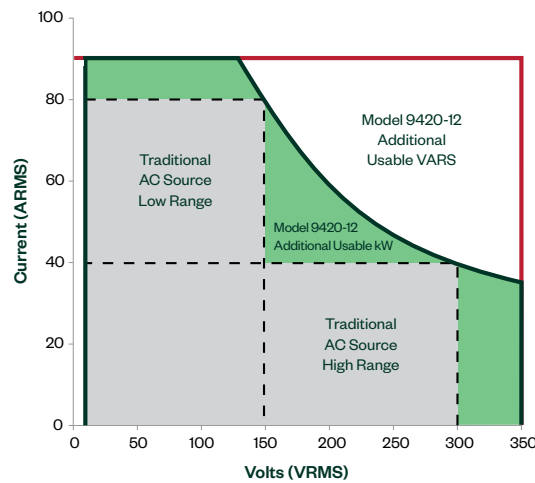


FIGURE 1

The Model 9420 12kW in single-phase mode Operating Envelope significantly extends the envelope of similarly sized AC sources especially where reactive power is encountered. Even without reactive power derating, the constant-power envelope results in substantially more useable true power.

Exceptional Configuration Flexibility

Independent power modules are the internal building blocks of the Model 9420 AC Power Source that provide unique configuration flexibility. That independence allows each power module to be programmed as all or part of a single-phase, split-phase or three-phase instrument. See Figure 2 for a graphic illustration of this feature. Additional flexibility is provided through the scalability from 12 to 96 kW of power, which allows starting with a source configured for today's power requirements and having the option to add modules in the future should the need ever arise.

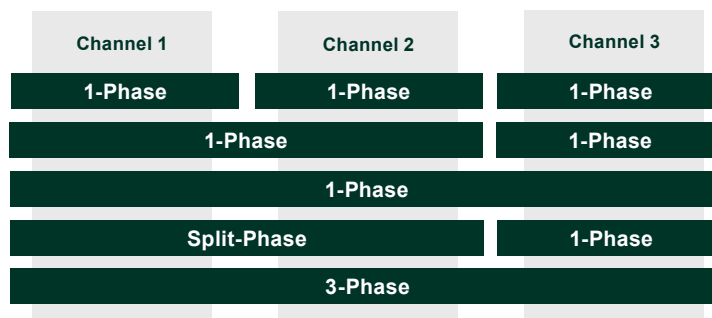


FIGURE 2

3 channels with multiple configuration possibilities.

Comprehensive Built-In Measurement System

The 9420 AC Power Source includes a built-in measurement system providing the essential power-related measurement functions of a voltage meter, current meter, power analyzer, and oscilloscope. This is accomplished by digitizing voltage and current for each phase in real-time to calculate 35 measurements including a time-stamp at the end of each cycle. Called Background Measurements, these values include the following: AC/DC Voltage and Current, True and Apparent Power, Crest and Power Factor, Frequency and Phase-Angle plus related Peak measurements.

This digitization technique is also used in capturing measurements during a user-specified time window. Called Aperture Measurements, up to 13 common power measurements are captured and available for immediate access. In addition up to 64,000 digitized values are stored, which may be downloaded for further analysis making it possible to derive almost any measurement conceivable. In this manner the 9420 is typically used without any supporting measurement instruments thereby making the test setup simpler and less expensive. In addition, built-in measurements provide a test system that is capable of higher test throughput due to eliminating the switching times necessary to access external measurement instruments.

EnergyStar Measurements

The 9420 AC Source includes 2 precision low-current measurement ranges to measure lightly-loaded, no-load and standby power current draw as required by the many energy efficiency standards. These measurement ranges eliminate the need for additional specialized equipment, routing, and additional test time

Power Line Disturbance Simulation

The 9420 AC Source is able to simulate power line disturbances through the combination of user-definable waveshapes and Macros. User-defined waveshapes permit generation of non-sinusoidal voltages including asymmetrical inflections, transient anomalies, voltage harmonics (Fig. 3) or any other irregularity which can be drawn as a single cycle. These waveshapes are created through a Graphical Waveshape Editor and downloaded to the Source where they are automatically scaled to the programmed voltage/frequency. Waveshapes may be applied at any phase angle similar to any other programmable setting.

Macros are a pre-programmed sequence of settings where each new setting is present for a sub-cycle, any number of cycles, or for a fixed amount of time. This sequence is entered using a menu-driven, programming-free interface. The sequence is then downloaded to the Source where it is executed to providing precise control of any phase. This combination of user-definable waveshapes and Macros insures the 9420 can simulate notches (Fig. 4), sags/swells (Fig. 5), ramps (Fig. 6), or any other real-world line condition which may be experienced in the field.

Waveform Capture			
Data Channels	6 ch (3 phases of voltage & current)	Memory	64k samples for each of 6 ch.
Bandwidth	DC to 100kHz	Accuracy/Resolution	0.5% Range/0.005% Range
Sample Rate	to 125 kSample/sec	Aperture	1 cycle to 64 sec (longer apertures will reduce the sample rate)
Aperture Measurements	13 total including AC/DC Voltage, Current, True Pwr, plus min/max Pks	Background Measurements	35 total incl. AC/DC Voltage, Current, True Pwr, Apparent Pwr, Freq., Pwr Factor, Crest Factor, Energy, Ph. Angle, Pk V, Pk I, Pk Pwr
Custom Waveform			
Standard	Sine, n-step Sine, Triangle, Clipped Sine, Notched Sine, Arbitrary (User Def.)		
User Defined	Graphical wave shape editor or downloaded Excel table		
Control			
User Interface	Built-In Touch Panel and/or external PC w/ Windows software tools including GUI	Drivers	Ni-Compliant LabVIEW Drivers, emPower (opt.), Enerchron (opt.)
External System Communication	LAN (Ethernet) supporting SCPI or VXI-II		

Waveforms

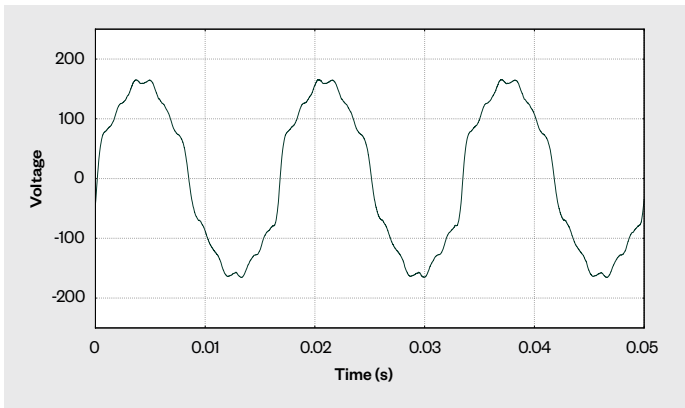


FIGURE 3
Voltage harmonics

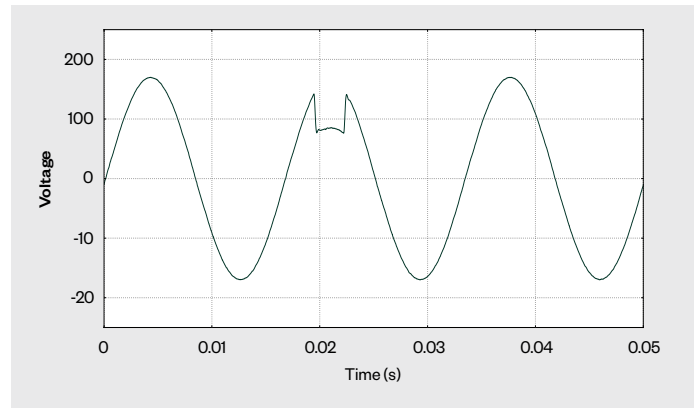


FIGURE 4
Notch

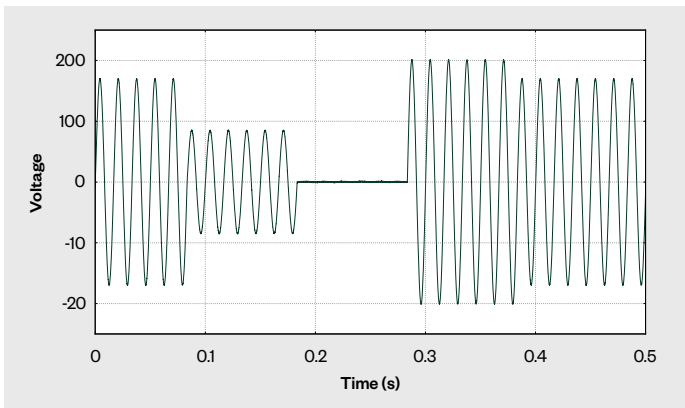


FIGURE 5
Sag dropout swell


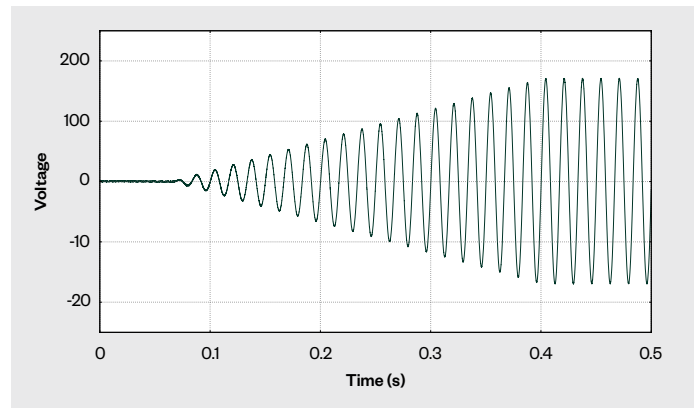


FIGURE 6
Ramp

Physical Connections and Controls

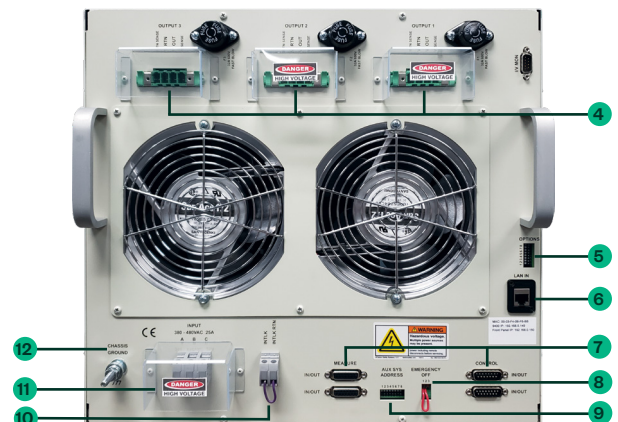

- 1 Touch Panel Based Control and Display
- 2 Status Lights & Trigger
- 3 Circuit Breakers
- 4 Output Power Connectors & External Sense
- 5 Options Switch
- 6 LAN (Ethernet) Port
- 7 Parallel Connections
- 8 Remote Emergency Off

- 9 Auxiliary Configuration
- 10 Safety Interlock
- 11 Input AC Power Terminal
- 12 Chassis Ground

NHR 9420 AC Power Source Specifications

MODEL NUMBER	9420-12	9420-24	9420-36	9420-48	9420-72	9420-96
AC Output Programmability						
Phases/Output Channels	Single, Split or 3-Phase					
Voltage ¹ (LR,HR)	10 - 175, 350VRMS L-N (split-phase limited to 250V max)					
Current Limit Set Ranges ¹ (per Φ)	6, 30A (3Φ)	12, 60A (3Φ)	18, 90A (3Φ)	24, 120A (3Φ)	36, 180A (3Φ)	48, 240A (3Φ)
Current Limit Set Max ¹ (per Source)	18, 90A (1Φ)	36, 180A (1Φ)	54, 270A (1Φ)	72, 360A (1Φ)	108, 540A (1Φ)	144, 720A (1Φ)
Power Limit Set Max ² (1, Split, 3Φ)	12, 8, 12kW	24, 16, 24kW	36, 24, 36kW	48, 36, 48kW	72, 48, 72kW	96, 64, 96kW
Maximum Apparent Power ²	31.5kVA	63kVA	94.5kVA	126kVA	189kVA	252kVA
Frequency	30 - 880Hz w/ ± (0.1% Set) Accuracy		Phase Angle	0 - 359° with 1° Accuracy		
Peak Current	3 X Max ARMS		Slew Rate	<200µs 10-90% of full scale change to resistive load		
Distortion	<1% @ 60Hz (Full power into resistive load at 480VRMS (L-L)/60Hz)					
DC Output Programmability						
Voltage Ranges ¹ (LR, HR)	10 - 200, 400VDC (< 800mV RMS Ripple)					
Current Limit Set, Max ¹ (per Source)	0 - 18, 90A	0 - 36, 180A	0 - 54, 270A	0 - 72, 360A	0 - 108, 540A	0 - 144, 720A
Power Limit Set, Max ² (per Source)	0 - 12kW	0 - 24kW	0 - 36kW	0 - 48kW	0 - 72kW	0-96kW
Measurements	Range	Accuracy				Resolution
Voltage Range (LR, HR)	260, 520V Pk					
AC RMS		±(0.1% Rdg + 0.06% Rng) @<100Hz, ±(0.2% Rdg + 0.12% Rng) @>100Hz				0.005% Rng
DC		±(0.1% Rdg + 0.1% Rng)				0.005% Rng
Peak Voltage		±(0.5% Rdg + 0.2% Rng) @<100Hz, ±(1.0% Rdg + 0.4% Rng) @>100Hz				0.005% Rng
Current per Phase (LR, HR)	20, 100A Pk	40, 200 A Pk	60, 300A Pk	80, 400A Pk	120, 600A Pk	160, 800A Pk
AC Current		±(0.1% Rdg + 0.1% Rng) @<100Hz, ±(0.2% Rdg + 0.2% Rng) @>100Hz				0.005% Rng
DC Current		±(0.2% Rdg + 0.1% Rng) High Range, ±(0.2% Rdg + 0.3% Rng) Low Range				0.005% Rng
Peak Current		±(0.5% Rdg + 0.2% Rng) @<100Hz, ±(1.0% Rdg + 0.4% Rng) @>100Hz				0.005% Rng
Power (kW, kVA)	V Rng x C Rng	±(0.2% Rdg + 0.1% Rng) @<100Hz, ±(0.2% Rdg + 0.2% Rng) @>100Hz				0.005% Rng
Energy (AH, kWh, kVAH)	Time dependent	0.3% Reading + 0.3% Rng				0.005% Rng
Power Factor	0 to +1.0	±(0.25% Rdg + 0.25% Rng)				0.005% Rng
Crest Factor	1 to 3	±(0.6% Rdg + 0.6% Reading Pk)				0.005% Rng
Ultra-Low Current Measurement	0.1, 1A/Φ	0.2, 2A/Φ	0.3, 3A/Φ	0.4, 4A/Φ	0.6, 6A/Φ	0.8, 8A/Φ
AC Current Accuracy	±1% Rng @<100Hz, ± 2% Rng @>100Hz		DC Current Accuracy		±1% Range	
Input Power						
Voltage	Universal Input - 380 to 480VAC ±10% (L-L, 3-Phase, 50/60Hz), 208VAC ±10% ³		Power Factor @ Full Power		Unity PF > 99% at full power into a resistive load at 480VRMS (L-L)/60Hz	
Frequency	49 - 51Hz or 59.3 - 60.5Hz		Cooling		Air Cooled 35°C Max Ambient, reduced power from 35 to 50°C	
Efficiency	89 - 92% (depending on line voltage) at full power into resistive load at 480VRMS (L-L)/60Hz					
Current/phase @ 380, 400, 480V	25, 24, 20A	49, 47, 39A	73, 69, 58A	97, 92, 77A	144, 137, 114A	192, 183, 152A
Calibration						
Method	Closed-cover with standard lab equipment capable of measuring to 0.25% of device specifications					

¹ Programming Accuracies for Voltage and Current are ±(0.2% Set+0.2% Range) @ <100Hz & ±(0.4% Set+0.4% Range) @ >100Hz. ² Programming Accuracies for Power are ±(0.4% Set+0.4% Range) @ <100 Hz and ±(0.8% Set+0.8% Range) @ >100Hz. Note: 1) Accuracies apply when Settings and/or Measurements are greater than 10% of Range. Voltage accuracy applies above 50V. 2) At 208V 3 phase input voltage, the total power of one chassis will be limited to 6.6kW