

Thermocouple and RTD Modules for Compact FieldPoint and FieldPoint

NI [c]FP-TC-120, NI [c]FP-RTD-122, NI [c]FP-RTD-124

NEW

- 8 temperature inputs
 - Thermocouple or millivolt
 - 2, 3, or 4-wire RTD inputs
- Built-in signal conditioning
 - 50 and 60 Hz noise rejection
- 16-bit resolution
- Input ranges software configurable per channel
- 2,300 V_{rms} bank isolation for transient overvoltage protection
- Hot-swappable with autoconfiguration
- -40 to 70 °C operating range



Module	Input Channels	Resolution	Input Type	Input Ranges (Software Configurable per Channel)	50/60 Hz Noise Filter	All-Channel Update Rate
[c]FP-TC-120	8	16 bits	Thermocouple Millivolt	J, K, T, N, R, S, W, B ±25 mV, ±50 mV, ±100 mV, -20 to 80 mV	✓	0.88 Hz
[c]FP-TC-122	8	16 bits	2, 3 wire-RTD Resistance	Pt 100, Pt 1,000 0 to 400, 0 to 4,000 Ω	✓	0.93 Hz
[c]FP-TC-124	8	16 bits	2, 4 wire-RTD Resistance	Pt 100 0 to 400 Ω	✓	0.93 Hz

Overview

The National Instruments [c]FP-TC-120 and [c]FP-RTD-12x devices are versatile temperature input modules for Compact FieldPoint and FieldPoint that can be used to measure thermocouples, millivolt level voltages, and 2, 3, and 4-wire RTDs in applications like temperature chamber control, device testing, and process control. Thermocouple sensors are low cost and flexible temperature devices. RTD sensors are used in applications where you need to acquire temperatures with high accuracy. Two and 3-wire RTDs work well for applications with short signal wires and low noise levels, 4-wire RTDs are well suited for applications with long signal wires or high noise levels. All these I/O modules include overranging and onboard diagnostics to ensure trouble-free installation and maintenance. The modules will both measure and linearize signals on-board to return scaled values to your control or monitoring software. NI TC-120 and RTD-12x modules come with NIST-traceable calibration certificates, ensuring accurate and reliable analog measurements.

Compact FieldPoint and FieldPoint

These modules are available for both FieldPoint and Compact FieldPoint, with identical measurement specifications, functionality, and accuracy. Compact FieldPoint is designed for industrial control applications that perform advanced embedded control, data logging, headless operation, and Ethernet connectivity. Compact FieldPoint, our most rugged and reliable platform, is designed for industrial and mobile environments with high shock, vibration, and temperature extremes.

FieldPoint is a lower-cost distributed I/O system with a variety of communication options in addition to Ethernet. It is designed to be mounted on DIN rails in static applications where the FieldPoint bank is connected to a PC for data collection, analysis, display, and storage.

Smart I/O Modules

With Compact FieldPoint and FieldPoint temperature input modules, you can connect directly to industrial sensors or units under test and get high-accuracy measurements. The modules filter, calibrate, and scale raw sensor signals to engineering units, as well as performing self-diagnostics to look for problems with the module or the wiring such as open thermocouples. With the temperature input modules, your software application reads a linearized, calibrated, and scaled value from the I/O module, eliminating the error-prone step of converting binary values to temperature. For increased accuracy and noise rejection, the temperature modules use a 16-bit delta-sigma ADC with an integrated lowpass filter on each channel, which is configured for 50 and 60 Hz rejection. With high-accuracy 16-bit delta-sigma ADCs on the I/O modules, you also get instrument-quality measurements on an industrially rugged, distributed, embedded system.

The temperature input family of modules offers a variety of different update rates to fit your application, ranging from 0.88 to 0.93 Hz. Overall data throughput depends on software loop speeds and network speeds.

Thermocouple and RTD Modules for Compact FieldPoint and FieldPoint

[c]FP-TC-120

The [c]FP-TC-120 includes eight differential inputs for thermocouples. It also provides cold-junction compensation using a thermistor embedded in the terminal base or connector block. An onboard microcontroller compensates and linearizes the thermocouple reading to the NIST-90 standard, using an advanced linearization routine for maximum accuracy.

[c]FP-RTD-122

The [c]FP-RTD-122 includes eight inputs for 2 and 3-wire RTDs. The module uses a stable current source for sensor excitation and an onboard microcontroller that linearizes and scales the measurements to temperature units. You can configure each channel of the modules to return data scaled to temperature (°C, °F, or °K) or resistance. The 3-wire configuration used with the [c]FP-RTD-122 eliminates errors caused by lead wire resistance but will not reduce errors caused by noise. If your application involves high signal noise or long wires, you should use a 4-wire RTD with the RTD-124 module.

[c]FP-RTD-124

The [c]FP-RTD-124 includes eight inputs for 2 and 4-wire RTDs. The module uses a stable current source for sensor excitation and an onboard microcontroller that linearizes and scales the measurements to temperature units. You can configure each channel of the modules to return data scaled to temperature (°C, °F, or K) or resistance. If your application involves long signal wires or high signal noise, you should use a 4-wire RTD with the RTD-124 module. The 4-wire configuration used with the [c]FP-RTD-124 eliminates voltage drop due to lead wire resistance and reduces errors caused by noise.

Isolation

The TC-120 and RTD-12x modules feature optical bank isolation with 2,300 V_{rms} of breakdown isolation. In addition, the [c]FP-TC-120 and [c]FP-RTD-122 provide double insulation for up to 250 V_{rms} of operational isolation. Compact FieldPoint can safely be used in applications where hazardous voltages are present with the cFP-CB-1 or cFP-CB-3 connector block. FieldPoint can safely be used in applications where hazardous voltages are present with the FP-TB-x terminal base. These Compact FieldPoint and FieldPoint modules do not have channel-to-channel isolation.

Isothermal Connectivity for the [c]FP-TC-120

For maximum accuracy, we recommend using an isothermal connector block or terminal base with the [c]FP-TC-120.

Compact FieldPoint – The cFP-CB-3 isothermal connector block minimizes the temperature gradient across wiring connections, improving the accuracy of the cold-junction measurement, and therefore, the thermocouple measurement.

FieldPoint – The FP-TB-3 isothermal terminal base minimizes the temperature gradient across the wiring connections, improving the accuracy of the cold-junction measurement, and therefore, the thermocouple measurement.

Field I/O Connections

Compact FieldPoint and FieldPoint modules include a built-in power distribution bus that provides multiple power connections on the module. A field-wired power supply connected to the voltage (V) and common (C) terminals is internally connected to a power distribution bus that provides additional breakout terminals for voltage supply (V_{SUP}) and common (COM). These terminals provide a convenient way to distribute power to field devices that require external power.

Each input channel on the TC-120 has two terminals for differential input:

1. Thermocouple positive input (IN+)
2. Thermocouple negative input (IN-)

Each input channel on the RTD-122 has three terminals:

1. Excitation output (EXCITE)
2. Sensing input (SENSE)
3. Common input (COM)

Each input channel on the RTD-124 has four terminals:

1. Excitation output (EXCITE)
2. Positive sensing input (SENSE+)
3. Negative sensing input (SENSE-)
4. Common input (COM)

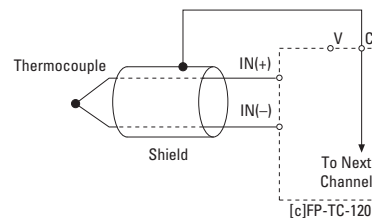
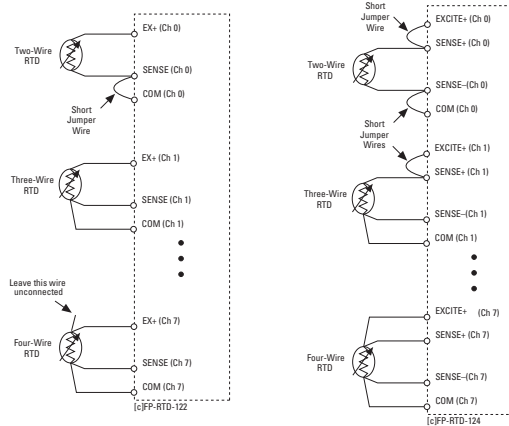


Figure 1. Wiring Schematic for RTD and TC Module

Thermocouple and RTD Modules for Compact FieldPoint and FieldPoint

Ordering Information

Compact FieldPoint

NI cFP-TC-120	777318-120
NI cFP-RTD-122	777318-122
NI cFP-RTD-124	777318-124

Recommended Compact FieldPoint System Products

NI cFP-2020	777317-2020
NI cFP-BP-4	778617-04
NI cFP-CB-1	778618-01
NI cFP-CB-3	778618-03
NI PS-5 Power Supply	778805-90
NI Developer Suite Professional Control Edition	777906-03

FieldPoint

NI FP-TC-120	777518-120
NI FP-RTD-122	777518-122
NI FP-RTD-124	777518-124

Recommended FieldPoint System Products

NI FP-1601	777792-01
NI FP-TB-1	777519-01
NI FP-TB-3	777519-03
NI PS-4 Power Supply	778586-90
NI Developer Suite Control Edition	777905-03

BUY ONLINE!

Visit ni.com/info and enter *cfptc120*, *cfprtd122*, *cfprtd124*, *fpct120*, *fprtd122*, and/or *fprtd124*.

Specifications

Typical for -40 to 70 °C unless otherwise noted.

Input Characteristics

Number of inputs	8
ADC resolution	16 bits, 1 in 65,536
Type of ADC	Delta-sigma
Filters	50/60 Hz rejection
Excitation current	
[c]FP-RTD-122	0.25 mA
[c]FP-RTD-124	2 mA
Data scaling options	
[c]FP-TC-120	Temperature (°C, °F, °K) or mV
[c]FP-RTD-122/124	Temperature (°C, °F, °K) or resistance (Ω)
Update period, all channels	
[c]FP-TC-120	1.13 s
[c]FP-RTD-122/124	1.08 s
Signal input bandwidth	3 Hz
Cold-junction accuracy ([c]FP-TC-120 with FP-TB-3 terminal base or cFP-CB-3 connector block)	0.25 °C typ, 0.5 °C max
Input impedance ([c]FP-TC-120)	20 MΩ
Input current ([c]FP-TC-120)	35 nA typ, 140 nA max
Input noise	±1 LSB _{pp}
Overvoltage protection ([c]FP-TC-120 only)	±40 V
Common-mode voltage referenced to isolated ground	
[c]FP-TC-120	1 V
[c]FP-RTD-122/124	2 V

Isolation Voltage

Maximum isolation voltage	250 V _{rms} , Installation Category II ([c]FP-TC-120 only)
Channel-to-channel isolation	No isolation between channels
Transient overvoltage	2,300 V _{rms}

Physical Characteristics

LED indicators	
POWER (green)	Power on and self-test passed
READY (green)	Module configured and ready
OPEN TC <0..> (red) ([c]FP-TC-120 only)	Open or broken thermocouple on channel
Dimensions	
(including FP-TB-x terminal base)	10.7 by 10.9 by 9.1 cm (4.2 by 4.3 by 3.6 in.)
Weight	140 g (4.8 oz)

Power Requirement

Power from network module	350 mW
---------------------------------	--------

Environmental

FieldPoint modules are intended for indoor use only. For outdoor use, they must be mounted inside a sealed enclosure.

Operating temperature	-40 to 60 °C
Storage temperature	-55 to 85 °C
Relative humidity	10 to 90%, noncondensing
Maximum altitude	2,000 m; at higher altitudes the isolation voltage ratings must be lowered.
Pollution degree	2

Shock and Vibration

These specifications apply only to Compact FieldPoint. NI recommends Compact FieldPoint if your application is subject to shock and vibration.

Operating vibration, random (IEC 60068-2-64)	10 to 500 Hz, 5 g _{rms}
Operating vibration, sinusoidal (IEC 60068-2-6)	10 to 500 Hz, 5 g
Operating shock (IEC 60068-2-27)	50 g, 3 ms half sine, 18 shocks at 6 orientations; 30 g, 11 ms half sine, 18 shocks at 6 orientations

Safety

This product is designed to meet the requirements of the following standards of safety for electrical equipment for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 3121-1, UL 61010C-1
- CAN/CSA C22.2 No. 1010.1

For UL, hazardous location, and other safety certifications, refer to the product label or to ni.com

Electromagnetic Compatibility

CE, C-Tick, and FCC Part 15 (Class A) Compliant	
Emissions	EN 55011 Class A at 10 m
FCC Part 15A above 1 GHz	
Immunity	EN 61326:1997 +A2:2001, Table 1

For EMC compliance, you must operate this device with shielded cabling.

CE Compliance

This product meets the essential requirements of applicable European Directives, as amended for CE Marking, as follows:

Low-Voltage Directive (safety)	73/23/EEC
Electromagnetic Compatibility Directive (EMC)	89/336/EEC

Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit ni.com/hardref.nsf/ and search by model number or product line.

Global Services and Support


NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance – and tailored for customer requirements in research, design, validation, and manufacturing. We have direct operations in more than 37 countries and distributors in another 12 locations. Our local sales and support representatives are degreed engineers, ready to partner with you to find solutions that best fit your needs.

Local Sales and Technical Support

In offices around the globe, our staff is local to the country so that you have access to field engineers who speak your language and are available to consult on your unique needs. We also have a worldwide support organization staffed with Applications Engineers trained to quickly provide superior technical assistance. Use our online Request Support interface (ni.com/support) to define your question, then speak to or e-mail an Applications Engineer, or access more than 14,000 worldwide measurement and automation professionals within NI Developer Exchange Discussion Forums. ni.com/support also provides immediate answers to your questions through self-help troubleshooting, product reference, and application development resources. For advanced technical support and software maintenance services, sign up for Premier Support, a program that provides expanded hours of support availability and expedited phone/e-mail response time (typically four business hours).

Training and Certification

NI recognizes that both initial instruction and ongoing education contribute to your success. NI provides a variety of training alternatives, from self-paced tutorials and interactive CDs, to worldwide hands-on courses taught by experienced instructors – all designed so that you can choose how to learn about our products. Further, NI offers certifications acknowledging individual expertise in working with NI products and technologies. Visit ni.com/training for more information.



Professional Services

Our Professional Services team consists of National Instruments Applications Engineers, NI Consulting Services, and the worldwide National Instruments Alliance Partner Program (a network of 600 independent consultants and integrators). Our Professional Services team can offer services ranging from basic start-up assistance and collaborative development with your engineers, to turnkey system integration and maintenance of your system.



In addition to our NI Alliance Partners, we have developed global relationships with many industry partners that range from computer software and hardware companies, such as Microsoft, Dell, Siemens, and Tektronix. By collaborating with these companies, you receive a complete spectrum of solutions – from components to turnkey systems. Find the Alliance Partner directory at ni.com/alliance

Product Services

NI hardware products are warranted against defects in workmanship and material for one year from the date of shipment. To help you meet project life-cycle requirements, NI offers extended warranties for an additional charge. NI provides complete repair services for our products. Express repair and advanced replacement services are also available. Or, order your software and hardware installed in PXI and PXI/SCXI™ systems with NI Factory Installation Services.

Ordering Made Easy

Visit ni.com/products to browse product specifications, make comparisons, or access technical representatives via online chat or telephone. Worldwide customers can use a purchase order or credit card to buy in local currency and receive direct shipments from local NI offices. Our North American Customer Service Representatives are available Monday through Friday between 7 a.m. and 7 p.m. Central Time. Outside North America, please contact the NI office in your country.

Order Status and Service Requests

National Instruments brings you real-time status on current orders at ni.com/status. Similarly, find out the status of open technical support incidents or hardware repair requests at ni.com/support/servicereq



ni.com • (800) 433-3488

National Instruments • Tel: (512) 683-0100 • Fax: (512) 683-9300 • info@ni.com