

SPECIFICATIONS

mmWave Transceiver System

Contents

Definitions.....	1
Conditions.....	2
System Performance and Characteristics.....	2
27.5 GHz to 29.5 GHz mmWave Transceiver System.....	2
71 GHz to 76 GHz mmWave Transceiver System.....	6
PXIe-3610 Waveform Generator.....	9
PXIe-3620 RF Upconverter and Downconverter Module.....	10
PXIe-3630 Digitizer.....	14
PXIe-7902 High-Speed Serial Instrument.....	14
mmRH-3602 mmWave Radio Head.....	15
mmRH-3642 mmWave Radio Head.....	15
mmRH-3647 mmWave Radio Head.....	16
mmRH-3652 mmWave Radio Head.....	16
mmRH-3657 mmWave Radio Head.....	17
Environment.....	17
Operating Environment.....	17
Storage Environment.....	18
Compliance and Certifications.....	18
Safety.....	18
Electromagnetic Compatibility.....	18
CE Compliance.....	19
Online Product Certification.....	19
Environmental Management.....	19

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- *Typical* specifications describe the expected performance met by a majority of the models.
- *Nominal* specifications describe parameters and attributes that may be useful in operation.

Specifications are *Characteristics* unless otherwise noted.

Conditions

Specifications are valid under the following conditions unless otherwise noted.

- Ambient temperature of $23\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$.
- The device is warmed up for 25 minutes.
- The PXI Express chassis fan speed is set to HIGH, the fan filters are clean if present, and the empty slots contain PXI chassis slot blockers and filler panels.

System Performance and Characteristics




Note Single-point calibration is used to correct for image rejection, and an equalizer is used to correct for amplitude ripple and phase nonlinearity within the instantaneous bandwidth. The internal LO2 is utilized for all measurements. Separate LO1s are utilized for the transmitter and receiver in all measurements.

27.5 GHz to 29.5 GHz mmWave Transceiver System


A variable attenuator is placed between the transmitter and receiver to simulate path loss at 28.5 GHz. The EVM of various single-carrier signals at a symbol rate of 768 Mbaud (RRC filter $\alpha = 0.3$) is shown in the following figure.

Figure 1. EVM Versus Loopback Attenuation

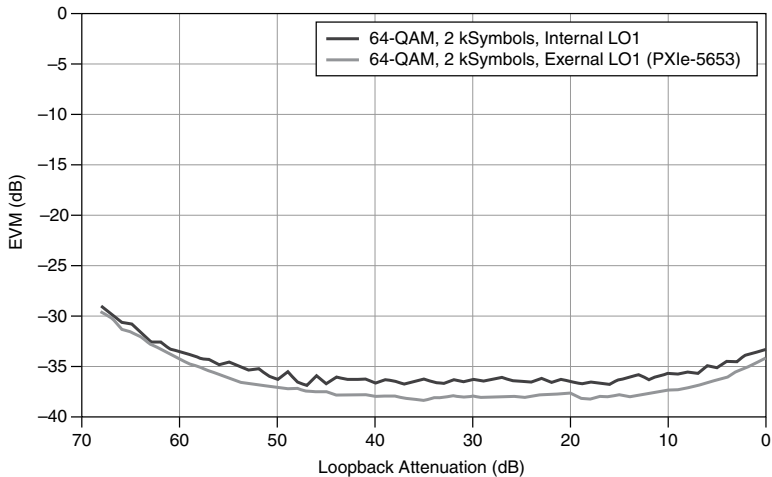

The transmitter and receiver gain settings used for the EVM measurement are shown in the following figure.

Figure 2. Transmitter and Receiver Gain Settings

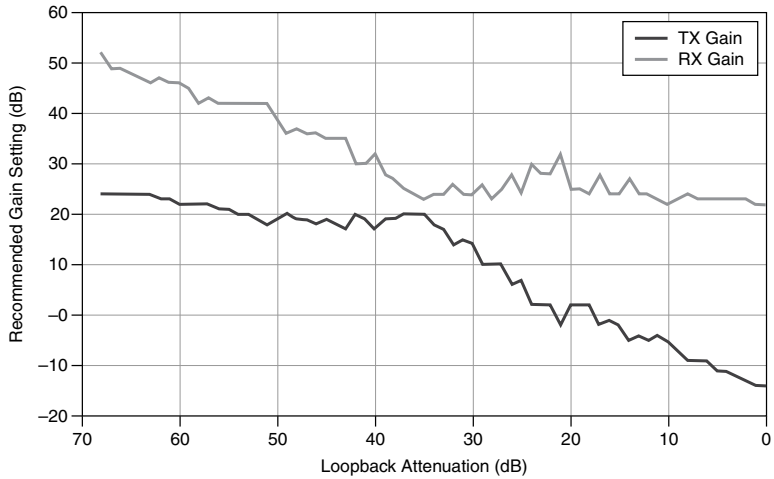


Transmitter

Tuning range	27.5 GHz to 29.5 GHz
Instantaneous bandwidth	2 GHz
Connector	2.92 mm
Analog gain range	55 dB
Saturated power ¹	26 dBm (approximately)
Output IP3 ¹	29 dBm

¹ At maximum gain.

Figure 3. mmRH-3642 mmWave Radio Head Simulated Output IP3 and Excess Noise Ratio (ENR)²

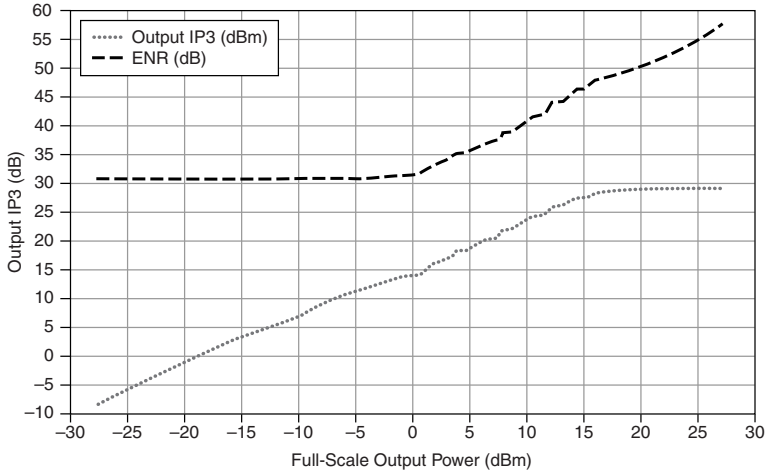

Note mmRH-3602 mmWave Radio Head simulated output IP3 and ENR² is very similar to that of the mmRH-3642.

Receiver

Tuning range	27.5 GHz to 29.5 GHz
Instantaneous bandwidth	2 GHz
Connector	2.92 mm
Analog gain range	50 dB
1 dB gain compression ³	-10 dBm to -15 dBm
Noise figure ¹	6 dB

² Driven by the PXIe-3610 Waveform Generator and the PXIe-3620 RF Upconverter and Downconverter Module with a two-tone signal at -7 dBFS.

³ Near minimum gain. For lower gain settings, 1 dB compression is higher than full-scale.

Figure 4. mmRH-3652 mmWave Radio Head Simulated Input IP3 and Noise Figure⁴


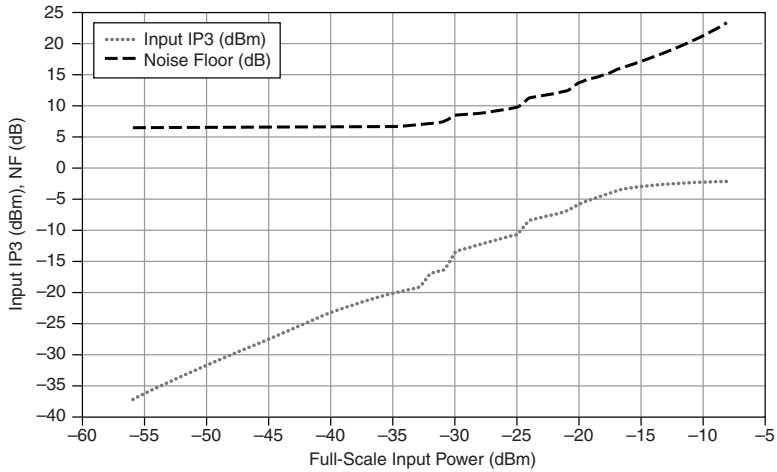


Figure 5. Receiver Maximum Power (Damage)⁵

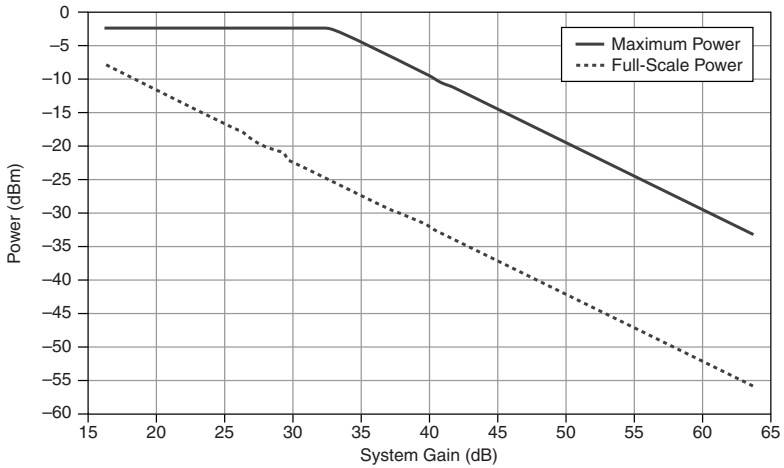

Note NI recommends keeping the incident power less than or equal to the full-scale power.


⁴ With the PXIe-3620 and the PXIe-3630 Digitizer.

⁵ Maximum power is the input power at which the receiver could be damaged.

71 GHz to 76 GHz mmWave Transceiver System


A variable attenuator is placed between the transmitter and receiver to simulate path loss at 73 GHz. The EVM of various single-carrier signals at a symbol rate of 1,536 MBaud (RRC filter $\alpha = 0.3$) is shown in the following figure.

Figure 6. EVM Versus Loopback Attenuation

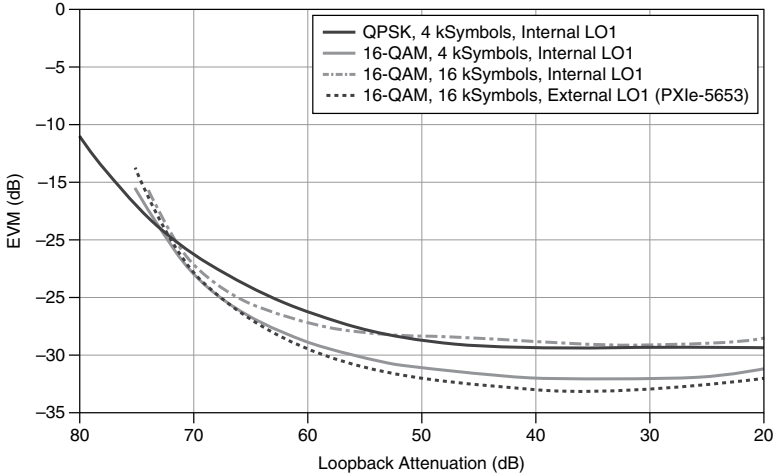

The transmitter and receiver gain settings used for the EVM measurement are shown in the following figure.


Figure 7. Transmitter and Receiver Gain Settings

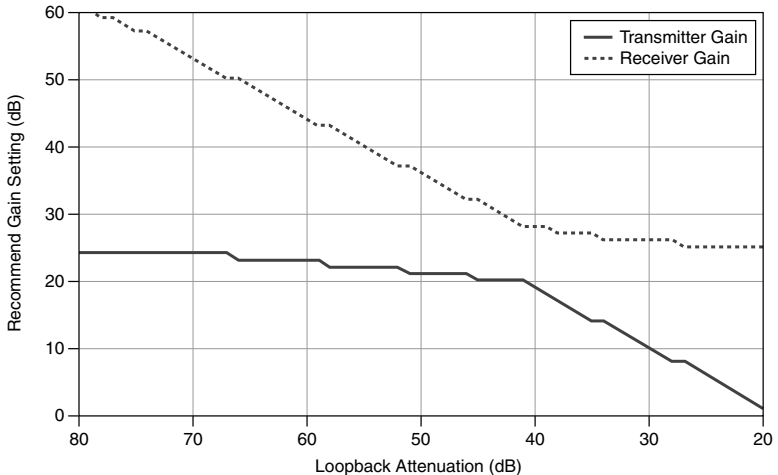

Transmitter

Tuning range	71 GHz to 76 GHz
Instantaneous bandwidth	2 GHz
Connector	WR-12
Analog gain range	55 dB
Saturated power ¹	+24 dBm
Output third-order intercept (IP3) ¹	+30 dBm
Local oscillator (LO) re-radiation ⁶	<-90 dBm

Figure 8. mmRH-3647 mmWave Radio Head Simulated Output IP3 and Excess Noise Ratio (ENR)²

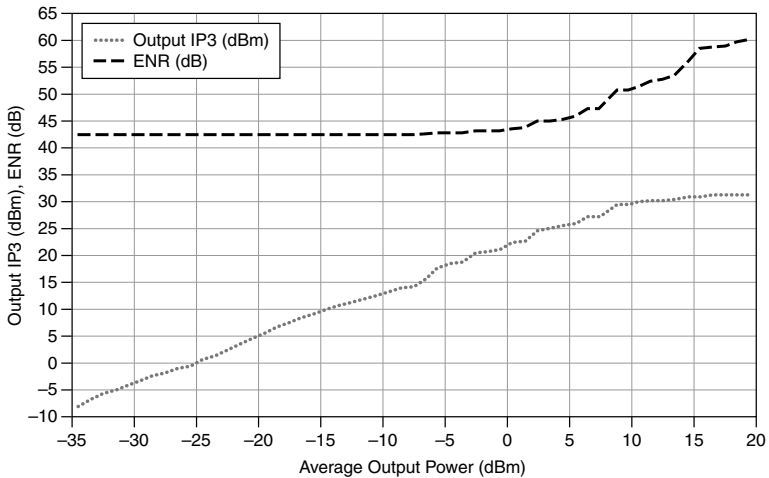

Receiver

Tuning range	71 GHz to 76 GHz
Instantaneous bandwidth	2 GHz
Connector	WR-12
Analog gain range	55 dB
1 dB gain compression ³	-12 dBm

⁶ Refers to super-heterodyne LO.

Noise figure¹

6 dB

Image rejection⁷

>80 dB

Figure 9. mmRH-3657 mmWave Radio Head Simulated Input IP3 and Noise Figure⁴


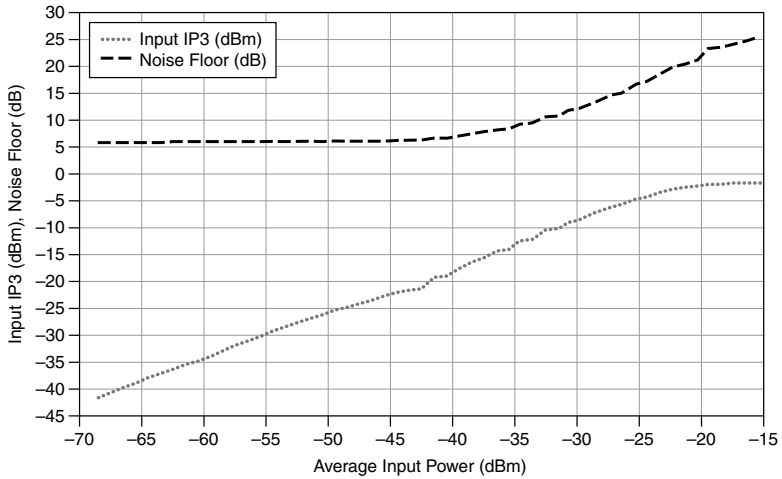


Figure 10. Receiver Maximum Power (Damage)⁵

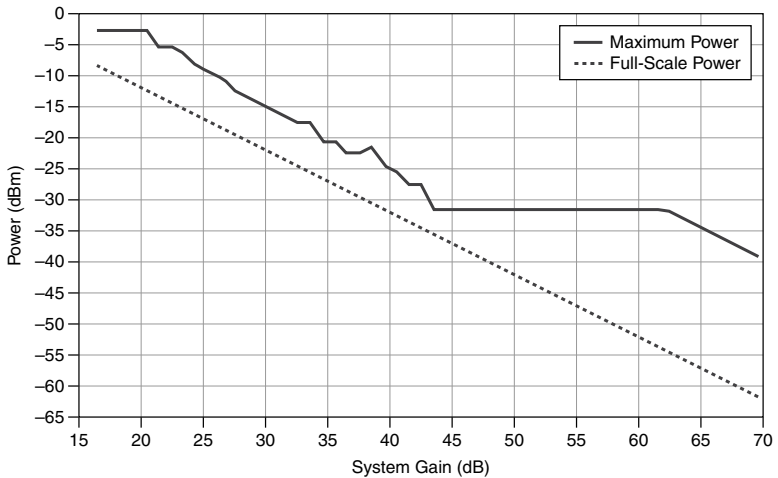

Note NI recommends keeping the incident power less than or equal to the full-scale power.

⁷ Refers to super-heterodyne image.

PXIe-3610 Waveform Generator

Sample rate	3,072 MS/s
DC offset	±40 mV
Second harmonics	-60 dBc
Third harmonics	-65 dBc
Bandwidth	
Per I or Q	DC to 1 GHz
Complex	2 GHz
I or Q Channels	
Connector	MMPX (100 Ω, differential)
Full-scale	+1 dBm; 1 V _{pk-pk}
Common-mode voltage	0 VDC
Flatness	±1.5 dB
Third-order intermodulation distortion (IMD3) ⁸	-75 dBc at 100 MHz -65 dBc at 1,000 MHz
Noise density	-155 dBm/Hz
Amplitude mismatch ⁹	±0.2 dB
Phase mismatch ⁹	±0.5 degrees
REF IN	
Connector	MMPX (50 Ω)
Frequency	10 MHz
Power	0 dBm to +13 dBm
REF OUT	
Connector	MMPX (50 Ω)
Frequency	10 MHz
Power	+10 dBm
Digital input	Mini-SAS HD

⁸ Two-tone signal at -7 dBFS.

⁹ Calibrated.

PXIe-3620 RF Upconverter and Downconverter Module

IF Interface

IF OUT

Connector	SMA female (50 Ω)
Tuning range	8.5 GHz to 13.5 GHz
Linear power	-40 dBm to 7 dBm

IF IN

Connector	SMA female (50 Ω)
Tuning range	8.5 GHz to 13.5 GHz
Linear power	-25 dBm to +20 dBm

LO1 Interface

LO1 TX/RX IN

Connector	MMPX female (50 Ω)
Frequency	4 GHz to 8 GHz
Nominal input level	+9 dBm
Damage level	+18 dBm

LO1 TX/RX OUT

Connector	MMPX female (50 Ω)
Frequency	4 GHz to 8 GHz
Maximum power	+8 dBm to +15 dBm

LO1 TX/RX mmWave OUT

Connector	SMA female (50 Ω)
Frequency	4 GHz to 13.7 GHz
Maximum power	+10 dBm to +15 dBm

Internal LO1 Frequency Resolution

4 GHz to 8 GHz	1 MHz
8 GHz to 13.7 GHz	2 MHz

LO2 Interface

LO2 IN


Connector	MMPX female (50 Ω)
Frequency	2.8 GHz to 4.5 GHz

Nominal input level	+9 dBm
Damage level	+18 dBm
LO2 OUT	
Connector	MMPX female (50 Ω)
Frequency	2.8 GHz to 4.5 GHz
Maximum power	+11 dBm to +13 dBm
LO2 REF IN/OUT	
Connector	MMPX female (50 Ω)
Frequency	10 MHz
Nominal level	1.6 V _{pk-pk}
Damage level	5 V _{pk-pk}
Internal LO2 frequency resolution	1 MHz
Baseband Interface	
I/Q OUT	
Connector	MMPX female (100 Ω differential)
Frequency	DC to 1 GHz
Nominal level ¹⁰	+5 dBm
Common-mode voltage	0 V _{DC}
I/Q IN	
Connector	MMPX female (100 Ω)
Frequency	DC to 1 GHz
Nominal level ¹⁰	+1 dBm
Damage level	+20 dBm
Common-mode voltage	0 V _{DC}

The following figure shows the simulated output IP3 and ENR of the PXIe-3620, when driven by the PXIe-3610 with a two-tone signal at -7 dBFS.


¹⁰ For a single I or Q differential port.

Figure 11. IF Transmitter Noise and Distortion

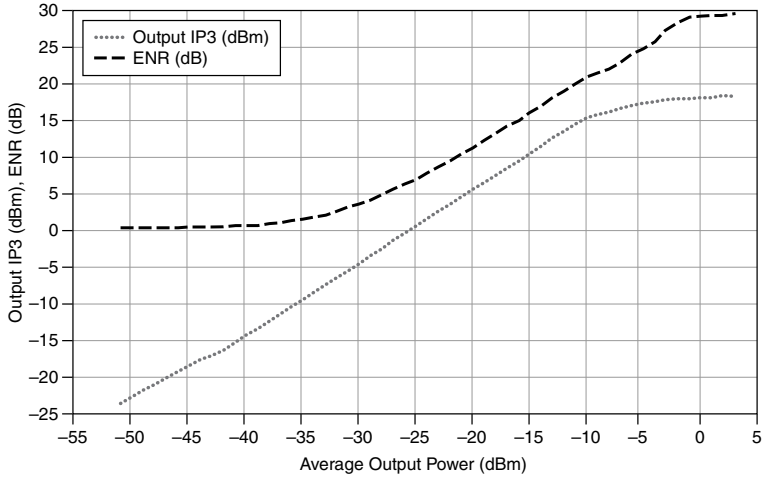

The following figure shows the simulated input IP3 and noise figure of the PXIe-3620 with the PXIe-3630.

Figure 12. IF Receiver Noise and Distortion

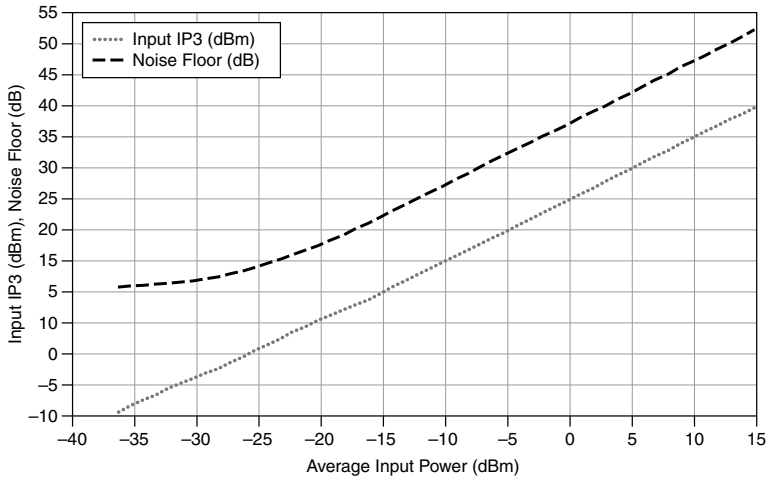


The phase noise added by the mmWave radio heads is nominally $20 \times \log_{10}(8)$ dB higher, due to the LO1 multiplication factor¹¹. Nominal single sideband (SSB) phase noise for the internal LO1 and internal LO2 on a PXIe-3620 module is shown in the following table.

Table 1. SSB Phase Noise

Offset	LO1 (dBc/Hz)	LO2 (dBc/Hz)
100 Hz	-70	-70
1 kHz	-92	-92
10 kHz	-98	-98
100 kHz	-104	-104
1 MHz	-130	-130

Figure 13. IF Receiver Maximum Power¹² (Damage)

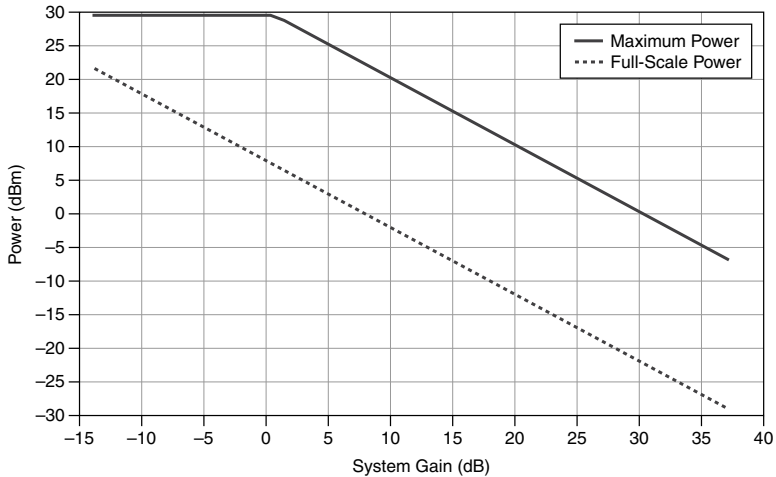

Note NI recommends keeping the incident power less than or equal to the full-scale power.

¹¹ For mmRH-3647/3657 radio heads, the multiplication factor is 8. For mmRH-3602/3642/3652 radio heads, the overall multiplication factor is 8; a factor of 4 comes from the radio heads, and a factor of 2 comes from the LO1 doubler.

¹² Maximum power is the input power at which the receiver could be damaged.

PXIe-3630 Digitizer

Sample rate	3,072 MS/s
DC offset	±10 mV
Second harmonics	-60 dBc
Third harmonics	-60 dBc
Bandwidth	
Per I or Q	DC to 1 GHz
Complex	2 GHz
I or Q Channels	
Connector	MMPX (100 Ω, differential)
Full-scale	+5 dBm, 1.59 V _{pk-pk}
Common-mode voltage	0 VDC
Flatness	±3.0 dB
IMD3 ⁸	-65 dBc at 100 MHz -60 dBc at 1,000 MHz
Noise density	-148 dBFS/Hz at 100 MHz -143 dBFS/Hz at 1,000 MHz
Amplitude mismatch ⁹	±0.2 dB
Phase mismatch ⁹	±1.5 degrees
REF IN	
Connector	MMPX (50 Ω)
Frequency	10 MHz
Power	0 dBm to +13 dBm
REF OUT	
Connector	MMPX (50 Ω)
Frequency	10 MHz
Power	+10 dBm
Digital output	Mini-SAS HD

PXIe-7902 High-Speed Serial Instrument



Note Refer to the *PXIe-7902 Specifications*, available online at ni.com/manuals, for specifications related to the PXIe-7902 High-Speed Serial Instrument.

mmRH-3602 mmWave Radio Head

RF IN/OUT

Connector	2.92 mm
Tuning range	27.5 GHz to 29.5 GHz

IF IN/OUT

Connector	SMA female (50 Ω)
Frequency range	9.56 GHz to 11.56 GHz

LO IN

Connector	SMA female (50 Ω)
Frequency range	9,515 MHz to 10,015 MHz
Power	+5 dBm

DC Power	2.5 A at +12 V
----------	----------------

Weight	2.4 lbs
--------	---------

Dimensions (L \times W \times H)	5.5 in. \times 5.0 in. \times 3.1 in.
--------------------------------------	---

mmRH-3642 mmWave Radio Head

RF IN/OUT

Connector	2.92 mm
Tuning range	27.5 GHz to 29.5 GHz

IF IN/OUT

Connector	SMA female (50 Ω)
Frequency range	9.56 GHz to 11.56 GHz

LO IN

Connector	SMA female (50 Ω)
Frequency range	9,515 MHz to 10,015 MHz
Power	+5 dBm

DC Power	2.0 A at +12 V
----------	----------------

Weight	1.8 lbs
--------	---------

Dimensions (L \times W \times H)	5.5 in. \times 5.0 in. \times 3.1 in.
--------------------------------------	---

mmRH-3647 mmWave Radio Head

RF IN/OUT

Connector	WR-12
Tuning range	71 GHz to 76 GHz

IF IN/OUT

Connector	SMA female (50 Ω)
Frequency range	11 GHz to 13 GHz

LO IN

Connector	SMA female (50 Ω)
Frequency range	7,375 MHz to 8,000 MHz
Power	+5 dBm

DC Power	1.8 A at +12 V
----------	----------------

Weight	4.8 lbs
--------	---------

Dimensions (L \times W \times H)	7.5 in. \times 4.6 in. \times 2.4 in.
--------------------------------------	---

mmRH-3652 mmWave Radio Head

RF IN/OUT

Connector	2.92 mm
Tuning range	27.5 GHz to 29.5 GHz

IF IN/OUT

Connector	SMA female (50 Ω)
Frequency range	9.56 GHz to 11.56 GHz

LO IN

Connector	SMA female (50 Ω)
Frequency range	9,515 MHz to 10,015 MHz
Power	+5 dBm

DC Power	1.5 A at +12 V
----------	----------------

Weight	1.8 lbs
--------	---------

Dimensions (L \times W \times H)	5.5 in. \times 5.0 in. \times 3.1 in.
--------------------------------------	---

mmRH-3657 mmWave Radio Head

RF IN/OUT

Connector	WR-12
Tuning range	71 GHz to 76 GHz

IF IN/OUT

Connector	SMA female (50 Ω)
Frequency range	11 GHz to 13 GHz

LO IN

Connector	SMA female (50 Ω)
Frequency range	7,375 MHz to 8,000 MHz
Power	+5 dBm

DC Power	1.2 A at +12 V
----------	----------------

Weight	4.8 lbs
--------	---------

Dimensions (L \times W \times H)	7.5 in. \times 4.6 in. \times 2.4 in.
--------------------------------------	---

Environment

Maximum altitude	2,000 m (800 mbar) (at 25 $^{\circ}$ C ambient temperature)
------------------	---

Pollution Degree	2
------------------	---

Indoor use only.

Operating Environment

Ambient temperature range	0 $^{\circ}$ C to 40 $^{\circ}$ C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit.)
---------------------------	--

Relative humidity range	10% to 90%, noncondensing (Tested in accordance with IEC 60068-2-56.)
-------------------------	---

Storage Environment

Ambient temperature range	-40 °C to 71 °C (Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2. Meets MIL-PRF-28800F Class 3 limits.)
Relative humidity range	5% to 95%, noncondensing (Tested in accordance with IEC 60068-2-56.)

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA C22.2 No. 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- EN 55022 (CISPR 22): Class A emissions
- EN 55024 (CISPR 24): Immunity
- AS/NZS CISPR 11: Group 1, Class A emissions
- AS/NZS CISPR 22: Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2014/35/EU; Low-Voltage Directive (safety)
- 2014/30/EU; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

Refer to the product Declaration of Conformity (DoC) for additional regulatory compliance information. To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial to the environment and to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all NI products must be disposed of according to local laws and regulations. For more information about how to recycle NI products in your region, visit ni.com/environment/weee.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Information is subject to change without notice. Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2016—2017 National Instruments. All rights reserved.

375847B-01 May 9, 2017