COPYRIGHT © 2026
NATIONAL INSTRUMENTS CORPORATION AND ITS LICENSORS. ALL RIGHTS RESERVED.



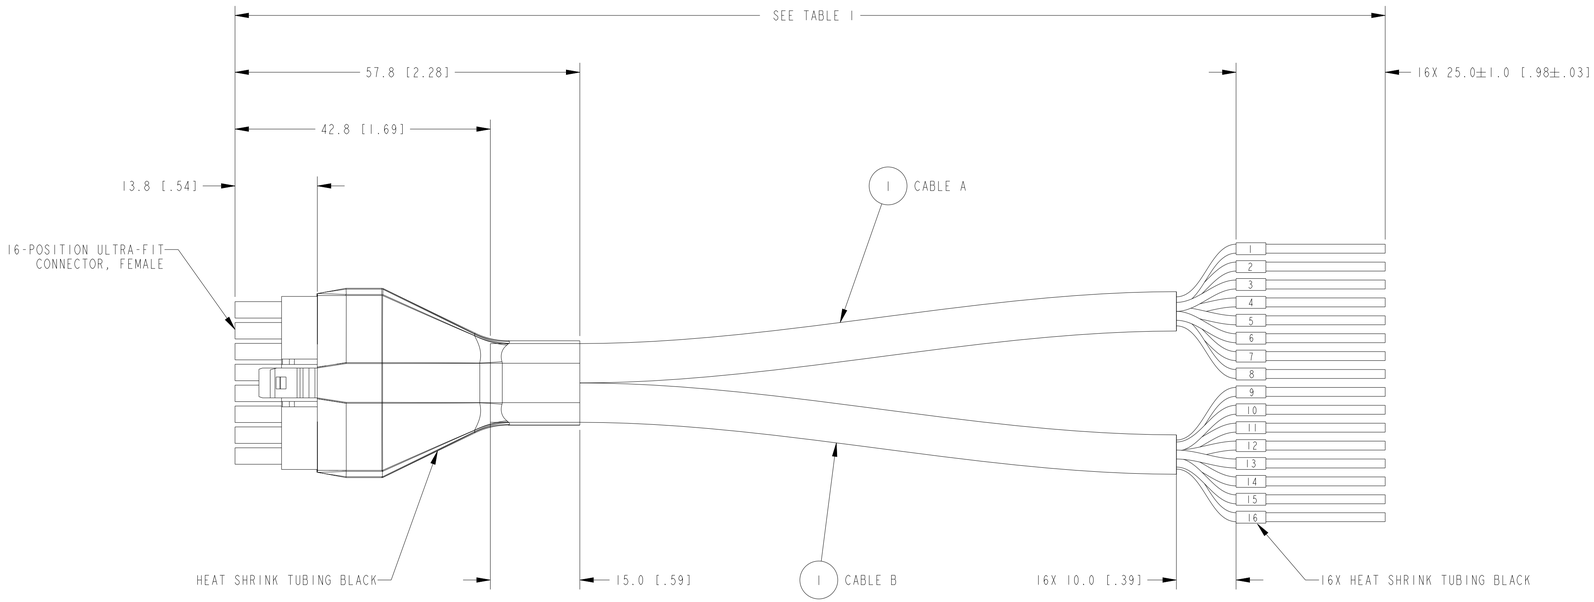

TABLE 1	
LENGTH	TOLERANCE
<2M	+5CM / -0CM
2M TO 5M	+10CM / -0CM
>5M	+15CM / -0CM

WIRE LIST			
PIN	WIRE COLOR	LABEL TEXT	CABLE
1	WHITE	1	A
2	BLUE	2	
3	GREEN	3	
4	PINK	4	
5	RED	5	
6	GRAY	6	
7	BROWN	7	
8	YELLOW	8	
9	WHITE	9	B
10	BLUE	10	
11	GREEN	11	
12	PINK	12	
13	RED	13	
14	GRAY	14	
15	BROWN	15	
16	YELLOW	16	

NOTE: WIRE LIST COLORS MAY NOT BE ACCURATE, AS THE RAW CABLE TYPE MAY CHANGE DURING PRODUCTION.

CABLE DETAILS				
REF DES	CONSTRUCTION	CONDUCTORS	INSULATION	JACKET
1	8 CONDUCTOR, UNSHIELDED,WITH FILLER	20 AWG (64/0.1) BARE STRANDED COPPER	SRPVC, 1.5 MM OD	PVC, BLACK, 6.60 MM OD

1. REFER TO PRODUCT MANUAL ON NI.COM FOR MORE DETAILS.

NOTES: UNLESS OTHERWISE SPECIFIED.

METRIC

CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS AND [INCHES]
0.X [.XX]±0.5 [.02] ANGLES:
0.XX [.XXX]±0.25 [.010] ±2°
DO NOT SCALE DRAWING
THIRD ANGLE PROJECTION

NI.COM
AUSTIN, TEXAS

TITLE
UF16F-P8M-P8M

SIZE	CODE IDENT NO.	MM/DD/YYYY
D	7U296	09/10/26

SCALE: 2/1 SHEET 1 OF 1

CU_UF16F-P8M-P8M