

## NOTE TO USERS

# NI 66xx Pinout Labels for the SCB-68A


### Counter/Timer Modules/Devices Using the 68-Pin Shielded Connector Block

If you are using an NI 66xx (formerly referred to as TIO) counter/timer device or module with the SCB-68A, you can print and attach a connector-specific pinout label to the cover of the connector block for easy connection reference. This document provides the label for the following models:

- NI 6601
- NI 6602
- NI 6608
- NI 6612
- NI 6614

Use the following label if you are connecting the SCB-68A to NI 6601, NI 6602, and NI 6608 models.

**Figure 1. NI 660x**



DIO/CTR	
68	D GND
34	PFI 31/P0.31/CTR 2 SOURCE
67	PFI 30/P0.30/CTR 2 GATE
33	D GND
66	PFI 29/P0.29/CTR 2 AUX
32	PFI 28/P0.28/CTR 2 OUT
65	D GND
31	PFI 27/P0.27/CTR 3 SOURCE
64	PFI 26/P0.26/CTR 3 GATE
30	D GND
63	PFI 25/P0.25/CTR 3 AUX
29	PFI 24/P0.24/CTR 3 OUT
62	D GND
28	PFI 23/P0.23/CTR 4 SOURCE
61	PFI 22/P0.22/CTR 4 GATE
27	D GND
60	PFI 21/P0.21/CTR 4 AUX
26	PFI 20/P0.20/CTR 4 OUT

DIO/CTR	
59	D GND
25	PFI 19/P0.19/CTR 5 SOURCE
58	PFI 18/P0.18/CTR 5 GATE
24	D GND
57	PFI 17/P0.17/CTR 5 AUX
23	PFI 16/P0.16/CTR 5 OUT
56	R GND
22	PFI 15/P0.15/CTR 6 SOURCE
21	PFI 14/P0.14/CTR 6 GATE
54	PFI 13/P0.13/CTR 6 AUX
20	D GND
53	PFI 12/P0.12/CTR 6 OUT
19	R GND
52	PFI 11/P0.11/CTR 7 SOURCE
18	D GND


DIO/CTR	
51	PFI 10/P0.10/CTR 7 GATE
17	PFI 9/P0.9/CTR 7 AUX
50	D GND
16	PFI 8/P0.8/CTR 7 OUT
49	D GND
15	PFI 7/P0.7
48	PFI 6/P0.6
14	D GND
47	PFI 5/P0.5
13	PFI 4/P0.4
46	D GND
12	PFI 3/P0.3
45	PFI 2/P0.2
11	D GND
44	PFI 1/P0.1
10	PFI 0/P0.0

DIO/CTR	
1	+5V
35	R GND
2	PFI 39/CTR 0 SOURCE
36	D GND
3	PFI 38/CTR 0 GATE
37	RESERVED
4	RESERVED
38	RESERVED
5	PFI 38/CTR 0 OUT
39	D GND
6	PFI 33/CTR 1 AUX
40	PFI 37/CTR 0 AUX
7	PFI 35/CTR 1 SOURCE
41	D GND
8	PFI 34/CTR 1 GATE
42	D GND
9	PFI 32/CTR 1 OUT
43	R GND

**SCB-68A Quick Reference Label**  
 NI 660x Counter/Timer (TIO) Models


R GND: These terminals are routed to RESERVED when using the product with a SH68-68-D1 shielded cable or routed to D GND when using the product with a R68-68 ribbon cable.

**Direct Feedthrough**



Use the following label if you are connecting the SCB-68A to NI 6612 and NI 6614 models.

Figure 2. NI 661x

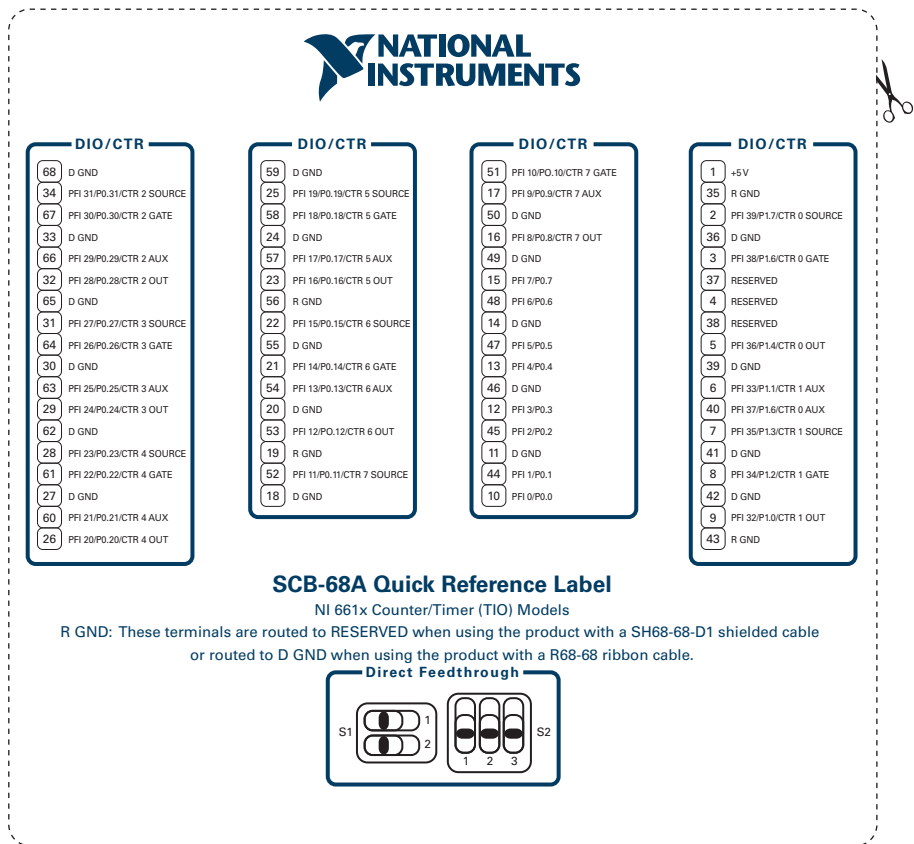

Refer to the *NI Trademarks and Logo Guidelines* at [ni.com/trademarks](http://ni.com/trademarks) for more information on NI trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering NI products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patents Notice* at [ni.com/patents](http://ni.com/patents). You can find information about end-user license agreements (EULAs) and third-party legal notices in the `readme` file for your NI product. Refer to the *Export Compliance Information* at [ni.com/legal/export-compliance](http://ni.com/legal/export-compliance) for the NI global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data. NI MAKES NO EXPRESS OR IMPLIED WARRANTIES AS TO THE ACCURACY OF THE INFORMATION CONTAINED HEREIN AND SHALL NOT BE LIABLE FOR ANY ERRORS. U.S. Government Customers: The data contained in this manual was developed at private expense and is subject to the applicable limited rights and restricted data rights as set forth in FAR 52.227-14, DFAR 252.227-7014, and DFAR 252.227-7015.

© 2017 National Instruments. All rights reserved.